

PTFE SEALING TAPE

EQUIPMENT FOR FUEL SYSTEMS › FITTINGS FOR WAREHOUSES AND SERVICE STATIONS

Non-sintered tape in virgin PTFE resin resistant to all chemical compounds and solvents, except gaseous fluorine or chlorine trifluoride and alkaline compounds, molten or in solution.

Operating temperature range: - 200° + 260° C.

Available belt widths (mm): 12 □ 19 □ 25

on request Width 12mm UNI 751/3 FRP

on request Width 12mm UNI 751/3 GRP

Roll lengths (m): 12 □ 15 - 25 - 50 metres


Thicknesses:

0.075 mm for hydraulics or standard uses

0.10 mm for Gas (pink version for steam)

0.20 mm for professional uses

Packed in cardboard boxes of 250 rolls

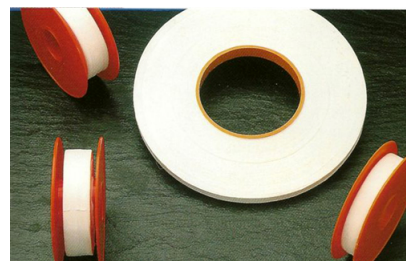

Mastertubi.it/q?306