

LIGHT POLYURETHANE HOSE (PUL) - 0.40

HOSES › Flexible polyurethane hoses for dust and shavings extraction

Very light and flexible polyurethane sheet tube, hardly flammable with incorporated harmonic steel spiral with silver coloured galvanic treatment.


Foil thickness: 0.40 mm

Color: transparent.

Standard sizes 10/20 metres, other sizes on request, packed in compressed cardboard boxes.

Operating temperature -40° +90° C, maximum temperature peak 125°C.

Axial compressibility: 8:1

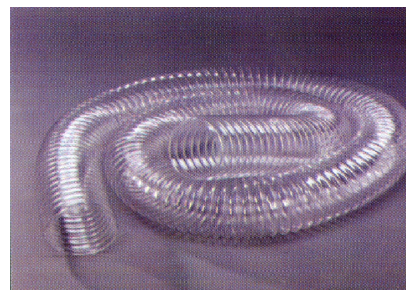

Mastertubi.it/q?412

Use: suction and delivery of air, fumes, dust, sawdust.

The following special versions are available:

- On request with built-in harmonic steel spiral with "brown-copper" galvanic treatment.
- Antistatic (guaranteed for 1 year from production)
- Permanent antistatic (R=100 M Ohm)
- Self-extinguishing
- FOOD GRADE
- FOOD GRADE Antistatic (guaranteed for 1 year from production)
- FOOD GRADE with AISI316 stainless steel spiral

Item	Øi mm	Operating pressure bar	Depression bar	Radius of curvature mm	weight g/m
11PVPUL000060	60	0.35	0.15	42	260
11PVPUL000070	70	0.35	0.13	55	310
11PVPUL000080	80	0.25	0.10	60	350
11PVPUL000100	100	0.20	0.09	75	420
11PVPUL000120	120	0.18	0.07	90	560
11PVPUL000130	130	0.15	0.06	95	590
11PVPUL000150	150	0.10	0.05	110	780

11PVPUL000160	160	0.10	0.05	120	830
11PVPUL000180	180	0.08	0.04	130	880
11PVPUL000200	200	0.07	0.04	150	980
11PVPUL000250	250	0.04	0.03	180	1180
11PVPUL000300	300	0.03	0.02	220	1420
11PVPUL000400	400	0.02	0.02	280	2390
11PVPUL000450	450	0.01	0.01	320	2610
11PVPUL000500	500	0.01	0.01	360	3100