

## PERISTALTIC TUBE

*HOSES › Flexible rubber hoses for suction of highly abrasive solids*

Black NR natural rubber hoses smooth inside and out in smooth format in ready CORD canvas.

Built to the strict specifications of the customer who uses peristaltic pumps. Synthetic textile reinforcements included in the wall.

Diameters between 10mm and 100mm, normally supplied in sizes for use.


Operating pressures varying between 10 and 40 bar with safety coefficient 3

Suitable for the passage of abrasive products mixed with water and/or mixed with low concentration acid/alkaline substances.

Hardness varies depending on the compound, however around 50/60 Shore

Temperatures between -10° and 80°C.

Connection using metal ties.

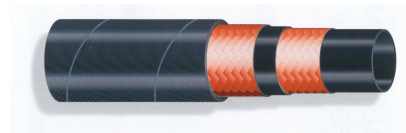

[Mastertubi.it/q?1190](http://Mastertubi.it/q?1190)