

UNDERGROUND PIPE 10/18 bar - delivery

HOSES › Flexible rubber hoses for suction of highly abrasive solids

Flexible rubber hose for delivery of abrasive products under pressure.

Smooth black underlayer, anti-abrasive and anti-static SBR/NR mix with 4 high-resistance textile reinforcement fabrics. Smooth black antistatic cover with canvas impression resistant to abrasion and atmospheric agents.


Use: delivery of grout, plaster and gypsum.

Standards: abrasion losses of the underlayer according to DIN 53516 70 +/- 5 mm 3.

Operating pressure 10 bar / Maximum working pressure 18 bar.

Burst pressure 30 bar / 54 bar.

Operating temperature: -40° +70° C

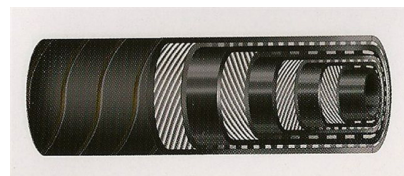

Mastertubi.it/q?415

Dimension Ø mm	Pressure of exercise Cafe	Weight per metre Kg
60x82	10	2.72
65x85	10	2.80
60x82	18	2.72
65x85	18	2.80