

ABRASIVE HOSE/18 BAR

HOSES › Flexible rubber hoses for suction of highly abrasive solids

Rubber tube with inner layer in smooth black anti-abrasive and anti-static **NR/SBR** rubber with highly abrasive fabric reinforcements. Smooth anti-abrasive anti-static **NR/SBR** rubber cover with cloth tread.

Application: High pressure sandblasting and shot blasting systems for the passage of sand or metal shot, pressurized cement powder and other abrasive products.


Standards: Abrasion loss of the substrate according to DIN 53516 70 +/- 5 mm 3

Maximum operating pressure 12 bar - burst 36 bar

Operating temperature: -40° +70° C.

Standard rolls 40/61 meters

Available on request with other dimensions, pressures, smooth/corrugated/corrugated, with terminal sleeves at the ends.

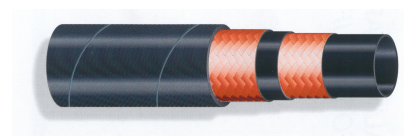

Mastertubi.it/q?853

Diameters mm	Rolls
13 x 25	40
16 x 30	40
19 x 30	40/61
19 x 33	40/61
25 x 40	40/61
30 x 45	40/61
32 x 48	40/61
38 x 54	40/61
40 x 60	40/61
51 x 71	40/61
60 x 80	40/61
65 x 85	40/61
80 x 105	40/61
90 x 115	40/61
102 x 127	40/61