


SAE 100 R6 HOSE

FITTINGS FOR COMPRESSED AIR › COMPONENTS FOR INDUSTRIAL COMPRESSED AIR PLANTS › HOSES FOR COMPRESSED AIR SYSTEMS

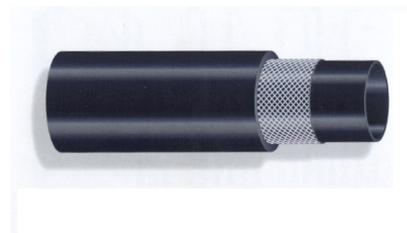

Smooth black NBR rubber underlayer, with textile reinforcement.


Smooth black NBR rubber cover resistant to hydrocarbons, atmospheric agents, ozone.

Complies with SAE 100 R6 □ EN 854 standard.

Can be used together with the relevant Push-Lock type fittings

oil mechanics with ogive seat, BSP thread.

Operating temperature: -40° +100°C

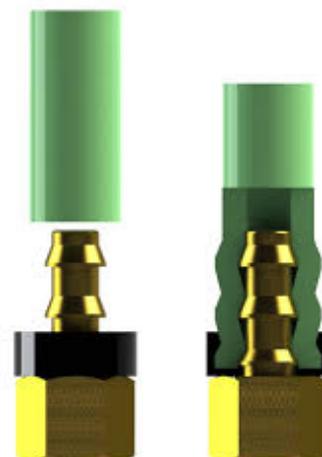

Mastertubi.it/q?340

code	Size mm	Operating pressure bar	Burst pressure bar	Curvature radius mm
13GR6000003/16	4.8x11.1	35	140	50
13GR60000001/4	6.4x12.7	28	112	65
13GR60000005/16	7.9x14.3	28	112	80
13GR60000003/8	9.5x15.9	28	112	90
13GR60000001/2	12.7x19.8	28	112	100
13GR60000005/8	15.9x23	25	100	125
13GR60000003/4	18x27.5	21	84	140
13GR60000001	25.4x35	20	80	170

