

DOUBLE-LAYER FIREPROOF NON-SPARKING POLYURETHANE HOSE

HOSES › Hoses for Pneumatic Applications › POLYAMIDE TUBES - RILSAN PA11 - PA12

Plasticized PA 12 PHL tube, stabilized to light and heat, covered by an external layer of self-extinguishing UL94 V2 ether-based polyurethane which ensures protection from sparks and welding spatter.

The external protective sheath has been designed to be easily removed with the appropriate tool, for easy installation with quick couplings.

Special caps are then molded with the same material as the sheath to protect the exposed part of the inner tube and the fitting.


Recommended fittings: all types of pneumatic fittings: quick, semi-quick, push-on, bicone.

Standard lengths: 25-50-100 m

Standards and declarations: [DIN 73378](#) - [DIN 74324](#) - [UL94 V2](#)

Operating temperatures: from -40°C to 80°C

Burst pressure safety factor: 3:1

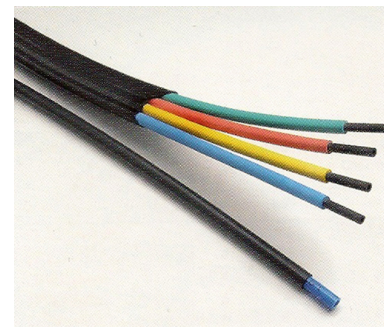

Mastertubi.it/q?398

CODE	Pipe diameters mm	Weight g/m	Radius of curvature mm	Pressure of exercise bar	diameter with sheath mm
04PA12DS020406	2x4	31	15	44	6
04PA12DS040608	4x6	46	30	26	8
04PA12DS060810	6x8	68	50	19	10
04PA12DS071012	7.5x10	80	60	19	12
04PA12DS091214	9x12	100	75	19	14