

PFA PIPE

HOSES › Flexible hoses in PTFE - FEP - PFA

Transparent fluoropolymer hose: excellent resistance to chemicals, temperatures, and abrasion.

High mechanical resistance, impermeable to gases, limited swelling by some solvents, impact resistant.

Great dimensional stability.

Non-toxic, exceptional resistance to the most aggressive chemicals, resistant to aging because it is inert to ultraviolet rays, unalterable upon contact with oxygen and ozone, great dimensional stability, excellent thermal stability. Ideal for use in level indicators.

Excellent dielectric properties.


Unaffected by contact with oxygen, ozone and ultraviolet rays.

Fire retardant to UL94 V0.

Operating temperature: -60° +260° C (500°F).

Melting point 327° C.

Hardness 60 shore D.

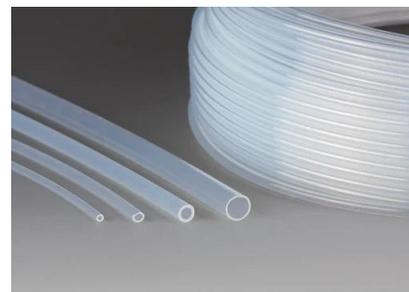

Mastertubi.it/q?297

Code	Size Ø mm	Operating pressure at 23°C bar	Burst pressure at 23°C bar	Weight gr/m	Bending radius mm
10PFA000002/04	2x4	28	140	21	20
10PFA000004/06	4x6	14	70	34	36
10PFA000006/08	6x8	9	46	47	64
10PFA000008/10	8x10	7	35	61	100
10PFA000010/12	10x12	5	30	80	150