

## HEAT PIPE/20/SD

HOSES › Hot water hoses

**Smooth black rubber hose with built-in steel spiral.  
Suitable for suction and delivery of hot and sea water.**

**Construction:** Heat-resistant EPDM synthetic rubber, synthetic textile reinforcements, aging- and weather-resistant EPDM synthetic cover. Embedded steel spiral.


**Appearance:** Smooth black exterior with canvas print, smooth black interior.

**Use:** Pipe suitable for the passage of hot water, even mixed with steam, and antifreeze liquids, in car radiators, engine cooling systems, heating circuits of vehicle cabins, chemicals, and sea water.

**Working temperature:** -40°C +120°C.

**Maximum continuous working pressure:** 20 bar - safety factor 3

**Packaging:** Rolls of 40/61 meters depending on the diameters

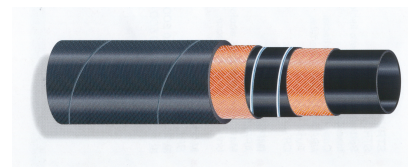

Mastertubi.it/q?1631

item	OR mm	radius of curvature mm	aspiration bar
09GCAL20_019/029	19x29	95	0.9
09GCAL20_025/036	25x36	125	0.9
09GCAL20_032/044	32x44	160	0.9
09GCAL20_035/046	35x46	170	0.9
09GCAL20_038/049	38x49	190	0.9
09GCAL20_051/063	51x63	255	0.9
09GCAL20_063/077	63.5x77	315	0.9

09GCAL20_076/090	76x90	380	0.9
09GCAL20_102/118	102x118	510	0.9
09GCAL20_127/146	127x146	620	0.8
09GCAL20_152/172	152x172	820	0.7