

SAE 100 R6 HOSE

HOSES › Specific flexible hoses for engine test rooms

Smooth black NBR rubber underlayer, with textile reinforcement.



Smooth black NBR rubber cover resistant to hydrocarbons,
atmospheric agents, ozone.

Complies with SAE 100 R6 □ EN 854 standard.

Can be used together with the relevant Push-Lock type fittings

oil mechanics with ogive seat, BSP thread.

Operating temperature: -40° +100°C

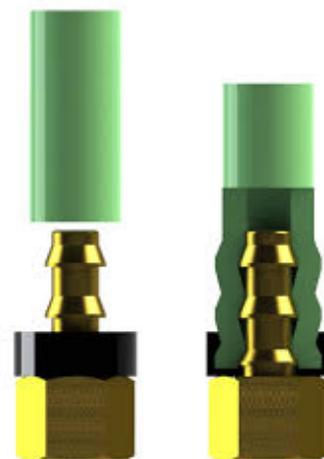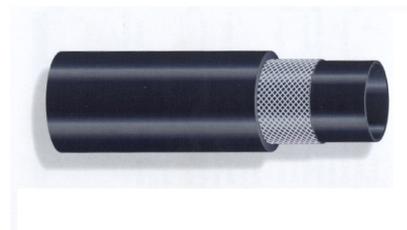

Mastertubi.it/q?340

code	Size mm	Operating pressure bar	Burst pressure bar	Curvature radius mm
13GR6000003/16	4.8x11.1	35	140	50
13GR60000001/4	6.4x12.7	28	112	65
13GR60000005/16	7.9x14.3	28	112	80
13GR60000003/8	9.5x15.9	28	112	90
13GR60000001/2	12.7x19.8	28	112	100
13GR60000005/8	15.9x23	25	100	125
13GR60000003/4	18x27.5	21	84	140
13GR60000001	25.4x35	20	80	170