

## HEAT PIPE/10/SPL MULTIPURPOSE

HOSES › Chemical hoses

**Smooth black rubber hose with embedded steel spiral. Suitable for suction and delivery of hot and sea water.**

**Construction:** Heat-resistant EPDM synthetic rubber, synthetic textile reinforcements, aging- and weather-resistant EPDM synthetic cover. Embedded steel spiral.

**Appearance:** Smooth black exterior with canvas print, smooth black interior.


**Use:** Pipe suitable for the passage of hot water, even mixed with steam, and antifreeze liquids, in car radiators, engine cooling systems, heating circuits of vehicle cabins, chemicals, and sea water.

**Working temperature:** -40°C +120°C.

**Maximum continuous working pressure:** 10 bar - safety factor 3

**Packaging:** Rolls of 20/40/60 meters DEPENDING ON THE DIAMETERS

**On request for some diameters also in super-flexible FLEX version for bending radii.**

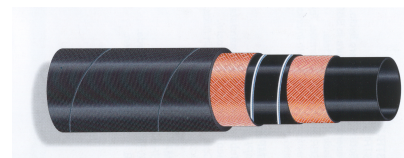

Mastertubi.it/q?694

item	OR mm	radius of curvature mm	RC FLEX mm	aspiration bar
09GCAL013/023SP	13x23	80	-	0.9
09GCAL016/026SP	16x26	90	70	0.9
09GCAL018/028SP	18x28	110	75	0.9
09GCAL019/029SP	19x29	115	-	0.9
09GCAL020/030SP	20x30	120	80	0.9
09GCAL025/035SP	25x35	150	100	0.9
09GCAL030/040SP	30x40	180	120	0.9
09GCAL032/043SP	32x43	190	130	0.9
09GCAL035/046SP	35x46	210	140	0.9
09GCAL038/049SP	38x49	230	150	0.9
09GCAL040/051SP	40x51	240	160	0.9
09GCAL045/057SP	45x57	270	180	0.9

09GCAL051/063SP	51x63	310	200	0.9
09GCAL060/071SP	60x71	360	240	0.9
09GCAL063/076SP	63x76	380	270	0.9
09GCAL070/082SP	70x82	420	280	0.9
09GCAL076/088SP	76x88	460	300	0.9
09GCAL080/092SP	80x92	480	320	0.9
09GCAL090/102SP	90x102	540	340	0.9
09GCAL102/117SP	102x117	610	400	0.9
09GCAL110/123SP	110x123	660	-	0.9
09GCAL120/137SP	120x137	720	680	0.9
09GCAL127/144SP	127x144	760	760	0.9
09GCAL152/170SP	152x170	920	920	0.8
09GCAL203/228SP	203x228	1220	-	0.7
09GCAL254/280SP	254x280	1524	-	0.7
09GCAL305/331SP	305x331	2100	-	0.5